

STT+ Single-span Steel Beam

Contents

Application options	2
Basis of calculation	4
Design values of the internal forces	4
Verification process	4
Analyses in the ultimate limit states	4
Analyses in the serviceability limit states	4
Basic parameters	5
Structural system	6
Loading	8
Standard loads / wizard	8
Area loads	8
Member loads	9
Design and analysis	12
Verifications in the ultimate limit state	12
Verifications in the serviceability limit state	12
Load transfer	12
Output	14
Frequently asked questions	15

Basic Documentation – Overview

In addition to the individual program manuals, you will find basic explanations on the operation of the programs on our homepage www.frilo.com in the Campus-download-section.

Tip: Go back - e.g. after a link to another chapter / document - in the PDF with the key combination "ALT" + "left arrow key".

Application options

The *STT+* application performs structural safety analyses in accordance with the equivalent member method for single-span beams of steel profiles as per EN 1993-1-1 with consideration of regulations in National Annexes.

- DIN EN 1993
- ÖNORM B 1993
- BS EN 1993
- PN EN 1993

Supporting conditions / lateral supports

The supporting conditions correspond to the statically determined single-span beam with fork supports. These supporting conditions always apply to both main axes.

Lateral supports can be defined to secure the beams against stability failure. You can enter a lateral supports in *STT+* either in the form of an elastic continuous support or as discrete supports in

- the centre of the span
- the third points
- the quarter points or
- at a point x_0 .

For more complex supporting conditions, an interface to the [BTII+](#) application is available.

Verifications

The following verifications are performed:

- Elastic or plastic cross sectional resistance.
- Load-bearing capacity of the system with the help of the equivalent member method
- Serviceability

Cross sections

- Standard I-sections
- User-defined double-symmetrical I-sections
- Standard round and square hollow sections
- User-defined round and square hollow sections

Actions

You can apply vertical and horizontal loading on the beam system and define concentrated moments. However, you cannot define loading that produces planned torsion.

Calculation

STT+ generates automatically the appropriate load cases and load case combinations depending on the defined actions and performs the necessary analyses, whereby the decisive load case combination is determined for each limit state.

Interfaces to other applications

The characteristic support reactions can be transferred to the applications *STS+*, *B5+/B5* and *HO1+*. Design values and support reactions can be transferred to the *ST4* and *B9* software applications.

If the real load conditions do not comply with the selected standard or the loading situation leads to planned torsion, you cannot use STT+ for the calculation. The BTII+ application is available for this purpose.

If you have a valid licence for the BTII+ application (2nd Order Buckling Torsion Analyses) you can transfer the structural system from STT+ to BTII+ via the data export function. The BTII+ application allows you to calculate more complex systems also in second-order buckling torsion analyses.

Basis of calculation

The basis of calculation of the STS+ application are the series of standards of Eurocode 3. The National Annexes for Austria and Great Britain are implemented in the current version of the application.

Design values of the internal forces

The internal forces for the decisive load combination are calculated in a first-order analysis.

All necessary combinations of actions are automatically taken into account in accordance with the safety concept set forth in the Eurocode 0.

The decisive internal forces combinations in the ultimate limit state are calculated for the verification of the cross-sectional resistance and the stability verification of the component.

The user must specify the design situation on which the serviceability analyses should be based.

The internal forces combinations for the design values of the support reactions are determined in addition.

Verification process

Analyses in the ultimate limit states

The load-bearing capacity verifications are based on the internal forces determined in the first-order analysis.

The stability verification of the component is based on the equivalent member method. This analysis is preceded by a numerical calculation of the respective buckling load factors.

Analyses in the serviceability limit states

The serviceability verification refers exclusively to the calculation of the displacement, separately for the different main axis and the resultants.


Deformations are also calculated in a first-order analysis. You should note that second-order deformations can be considerably greater than first-order deformations. If the deformations are of particular importance, you should perform an extended second-order analysis. If you have a valid licence for *BTII+* you can use this application for this task

Load transfer

You can [transfer loads](#) to the following application programs:

- Steel Column STS+
- Timber column HO1+
- Reinforced concrete column B5/B5+
- Beam support ST4
- Reinforced concrete corbel B9

You should note in this connection that the reaction forces are calculated as characteristic values in first-order analyses for each load case.

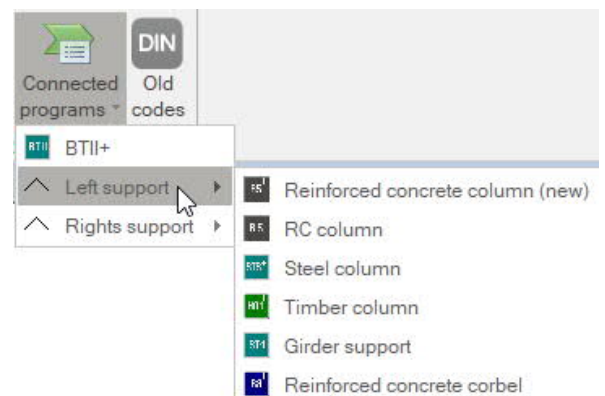

Basic parameters

Standard and safety concept

Design standard selection of the relevant National Annex for the load-bearing capacity verification as per EC3.

Consequence class allows you to define the consequence class on which the safety concept should be based: CC1, CC2 or CC3.

Structural safety

Cross section design the cross section design is optionally performed in accordance with the

- elastic method or the
- plastic method as per Para. 6.2

Equivalent member verification the verification in accordance with the equivalent member method is based on

- 6.3.3 (annex A or B) or on
- 6.3.4

Serviceability


Design situation defines the design situation for the verifications in the limit state of serviceability.

Verify absolute deformation performs the serviceability verification with consideration of the difference in deformation in comparison to the undeformed system.

Absolute limit deformation the permitted maximum absolute deformation of the structural system.

Verify relative deformation performs the serviceability verification with regard to the effective lengths, which are determined by the turning points (moment passage) of the bending line.

Relative limit deformation the permitted maximum relative deformation of the structural system.

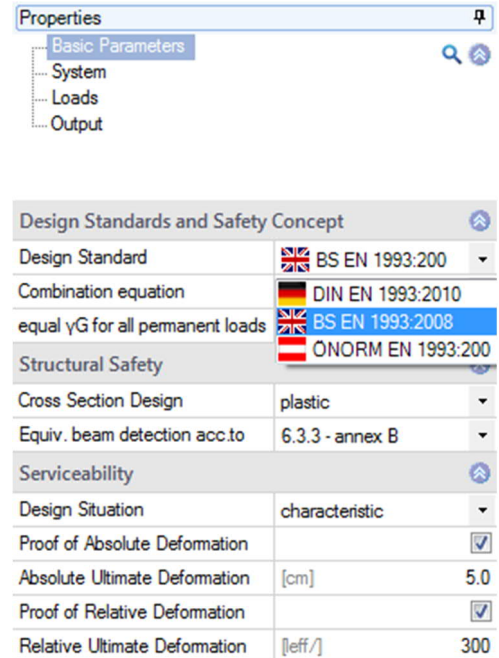

Structural system

Material

Steel type the following steel types are currently available for selection:

Material	
Type of steel	structural steel
Steel grade	structural steel
System	normalized steel
	thermo steel
	weather-proof steel
Length	heat resisting steel
Cross-section	thermof. hollow sect.
	hollow section N
Intermediate support in y-direction	user defined type
Restrain	not supported
Remarks	
... System	

Properties	
Basic Parameters	
System	
Loads	
Output	

Material	
Type of steel	structural steel
Steel grade	S235
System	
Length	[m] 5.00
Cross-section	HEA 200
Intermediate support in y-direction	
Restrain	not supported
Remarks	not supported
... System	continuously supported
	restrained in mid-span
	restrained in 1/3 points
	restrained in 1/4 points
	restrained in distance x0

Steel grade the available options for the steel grade depend on the selected steel type.

Parameters if you have selected "user-defined steel type", you can display a dialog for the definition of the steel


parameters by activating the button. Otherwise, the parameters of the selected steel are displayed in this section.

Structural system

Length length of the beam in the x-direction.

Cross section activating the button displays a dialog for the selection of the steel shape.

The manipulation of the dialog is described for all applications that include this dialog in the document "[Select - edit cross section - PLUS.](#)"

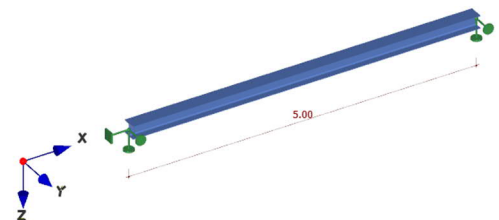

Only steel shapes that are approved for the equivalent member method are displayed.

Intermediate support in the y-direction

You can define lateral supports in this section. This allows you to simulate bracing (discrete supports) or plate-type stiffening structures (continuous supports).

Note: The supports are generated with a very high default spring value that produces a quasi-rigid support. If you like to define more refined springs you should use the BTII+ application. (See [Interface to BTII+](#)).

Intermediate support in y-direction	
Restrain	continuously supported
Location of Supports	not supported
Remarks	continuously supported
	restrained in mid-span
	restrained in 1/3 points
	restrained in 1/4 points
... System	restrained in distance x0


Location of the support

It is of essential importance for the examination of the stability to define where the lateral supports apply to the cross section.


The selection list allows you to specify the point of application of the lateral support.

See also the drawings:

Intermediate support in y-direction	
Restrain	continuously supported
Location of Supports	in shear center
Remarks	in shear center On upper chord On lower chord
... System	

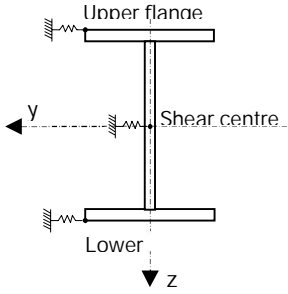Shear centre	
Upper flange	
Lower flange	


Remarks

... about the system activating the  button displays a dialog where you can enter an explanatory text. You can optionally display or hide this text in the [Output](#).

Loading


Standard loads / wizard

The wizard allows the user to generate a calculable basic system by defining a few parameters (Standard loads ...). The user can enhance and customize the item subsequently.

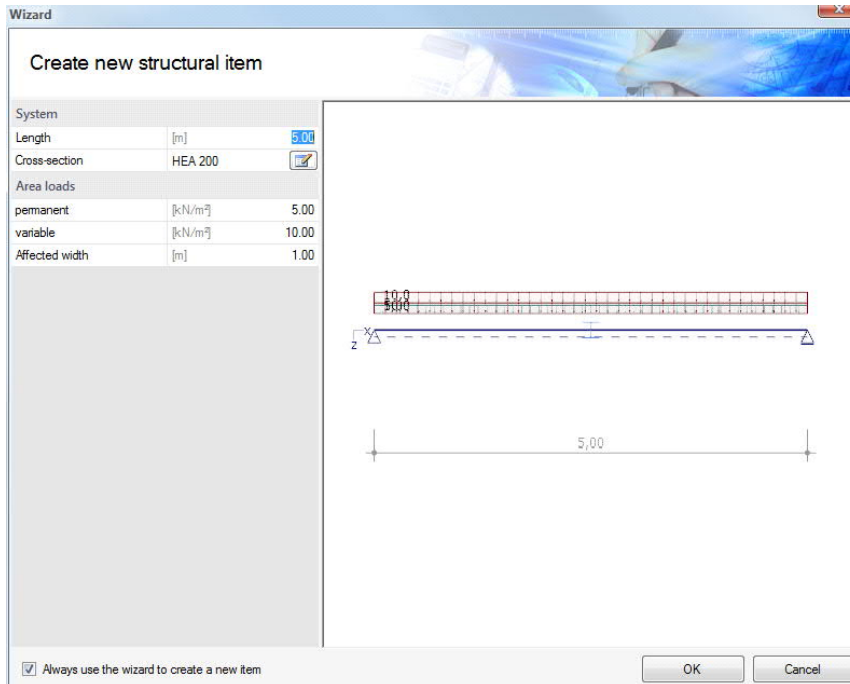

Area loads

Load definition

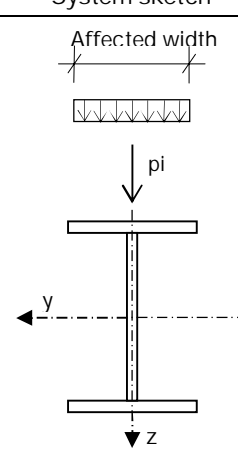Value	Description	System sketch
Permanent	Permanent portion of the characteristic vertical load.	
Variable	Variable portion of the characteristic vertical load.	
Affected width	Affected width of the vertical area load.	


Action group

The vertical area loads are always classified as "imposed loads of class A" (action group 1). You can edit the actions at a later time in the load table.

Self-weight


...consider automatically


if you activate this option, the self-weight of the beam is taken into account automatically.

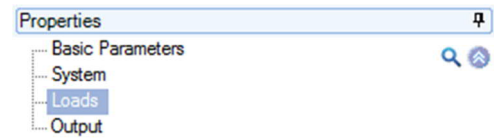


Member loads

Enter the data of the first load case in the data-entry mask or directly in the load case table, which you can display by activating the



To add additional loads, insert a new row first by activating the  button.







Tip: A description is displayed in the status line each time you click into a particular data-entry field.

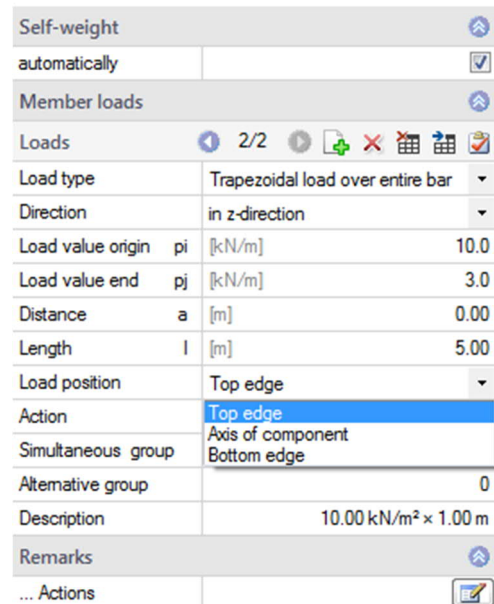


	Load type	Direction	pi	pj	a	l	Load attack point	Action	Zus	Alt	Description
1	Continuous distr. load	in z-direction	4.0	---	---	---	top	Permanent loads	0	0	5.00 kN/m ² × 1.00 m
2	Continuous distr. load	in z-direction	10.0	3.0	0.00	5.00	top	Cat. A: domestic, residential areas	0	0	10.00 kN/m ² × 1.00 m

Alternative data entry in the FDC section: see also Data entry via tables ([Basic Operating Instructions](#))

Load type select a load type from the list.
 p_i, p_j are characteristic load values.

Uniformly distributed linear load	A linear load that applies constantly over the total length of the beam.	
Concentrated load (point load)	A concentrated load applying at the distance a from the left support.	
Concentrated moment (point moment)	A moment applying at a distance a from the left support.	
Line load from a to $a+l$	A linearly variable load distributed over the beam length l applying at a distance a from the left support.	
Triangular load over entire member	A triangular load variable over the total length of the beam.	
Trapezoidal load over entire member	A trapezoidal load variable over the total length of the beam.	

Direction selection of the direction of action. The loads or concentrated moments act in the direction of or about the global y-axis or z-axis. Concentrated loads also act in the direction of the x-axis.

Load position selection of the load position at the cross section (top/bottom edge). You can display the corresponding dialog in the load table by activating the  button.

Load position	Top edge
Action	Top edge
Simultaneous group	Axis of component
	Bottom edge

Action category or kind of action of the load

Concurrent group

assignment of the load to a group of loads acting simultaneously. The group is defined by a group number entered by the user. Loads that are assigned to the same concurrent group always apply simultaneously. Loads in a concurrent group must also be member of an action group.

Permanent loads
Cat. A: domestic, residential areas
Cat. B: office areas
Cat. C: congregation areas
Cat. D: shopping areas
Cat. E: storage areas
Cat. F: traffic $F \leq 30$ kN
Cat. G: traffic $30 \text{ kN} < F \leq 160$ kN
Cat. H: roofs
Wind loads
Snow loads $H < 1000$ m
Snow loads $H > 1000$ m
Temperature
Settlements
Accidental actions
Seismic loads

Alternative group assignment of the load to a group of loads excluding each other. The group is defined by a group number entered by the user.

Description you can optionally enter a short note that appears in the output.

Comments allows you to enter personal comments on the loads. You can optionally hide or display these comments in the [output](#).


III.:

Principle representation of the concurrent and alternative groups.

Load 1 and 3 act together and are therefore assigned to the concurrent group 1. The same applies to load 2 and 4 (concurrent group 2).

The concurrent groups 1 and 2 are assigned to the alternative group 1.

Therefore, the loads of these two groups cannot apply simultaneously.

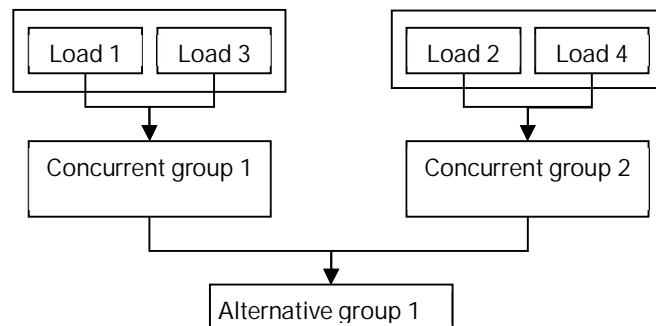

Design and analysis

Verifications in the ultimate limit state

The analyses in the ultimate limit state include the following individual verifications:

- Verification of the cross-sectional resistance with consideration of local buckling failure (verification of the c/t -limiting values and assignment to cross section classes).
- Verification of the plastic cross-sectional resistance as per EN 1996-1-1, para. 6.2.
If you have activated the "Elastic design" option when defining the basic parameters, the elastic verification is performed in accordance with equation 6.1.
- Stability verification as per EN 1993-1-1, para. 6.3.3 or 6.3.4.

The stability analyses of lateral buckling and lateral torsional buckling are based on the so-called equivalent member method.

When applying the simplified analysis, an eigenvalue calculation is performed using the subspace method. The eigenvalue determination for the FE problem requires the solution of the general matrix eigenvalue problem for the smallest eigenvalue η_k . This task is handled in STT+ via the calculation module of the BTII+ application. The examination is performed for each load case combination separately for each applicable design situation. This method ensures that the actually decisive failure situation in accordance with the safety concept can be determined.

Verifications in the serviceability limit state

The displacements in direction of the different main axes and the resulting displacement are calculated in a first-order analysis. The results are compared to the parameters defined by the user. The verification is considered successful when the calculated displacements are smaller or equal to the user-defined values.

Load transfer

The term load transfer refers basically to two extended functions, the transfer of the structural system to BTII and the transfer of support reactions for the calculation of connected structures.

System transfer to the BTII+ application

General

The first extended function consists in exporting the beam system to the BTII+ application allowing the user to calculate more complex structural systems or to perform comparative calculations.

Higher requirements on the calculation of beam systems which cannot be fulfilled by an application such as STT+, become relevant if the supporting conditions do not comply with the relevant standard or if loads have to be included that produce either planned torsion or inconstant behaviour of the axial forces. Such systems cannot be verified using the equivalent member method. They require second-order analyses with consideration of warping torsion. The BTII+ application offers the necessary performance parameters for this task.

Exporting the structural system

The column system is represented as a system section in the BTII+ application. The supporting conditions correspond to the structural system of the beam including the lateral supports.

Transferring supporting forces

STT+ offers a load transfer feature to other applications for the calculation of connected structures and foundations.

The interfaces to *STS+ Steel Column*, *B5+/B5 – Reinforced Concrete Column* and *H01+ Timber column* allow the transfer of the characteristic support reactions for the calculation of beam supports.

Design values and support reactions can be transferred to the applications *ST4 - Steel Girder Support* and *B9 - Reinforced Concrete Corbel*.

Output

By checking or unchecking the various output options, you can define the scope of the output (if an option is checked, the associated contents is integrated in the output document)

The options are described by tooltips and explanatory notes in the information section on the bottom of the screen.

Scale of system graph by modifying the default scale you can adjust the size of the graph in the output document according to your requirements.

Output as a PDF file

The Document tab displays the document in PDF format. You can display, save and print the PDF document.

A general description of the output options is available in the document:

[Output and Printing](#)

Properties

- Basic Parameters
- System
- Loads
- Output**

General

Brief output	<input checked="" type="checkbox"/>
Notes	<input type="checkbox"/>

System

System- and load- graphics 2D	<input checked="" type="checkbox"/>
System graphics 3D	<input type="checkbox"/>
System graphics scale	[1:] 50

Loads

Actions	<input checked="" type="checkbox"/>
---------	-------------------------------------

Results

Support reaction- characteristic per loadcase	<input checked="" type="checkbox"/>
Support reactions - design values	<input type="checkbox"/>

Frilo Software
 Stuttgarter Str. 40 | Tel: +49 711 810020 | Project: Manuals
 70469 Stuttgart | Fax: +49 711 858020 | Item: STT+-DZ002
 4/26/2016 | Page: 2

Cross-section - HEA 200

Section	h = 19.0 cm	
Web (clearance)	h ₁ = 13.4 cm	s = 0.7 cm
Top and bottom chord	b = 20.0 cm	t = 1.0 cm
Curvature	r = 1.8 cm	
Area	A = 53.8 cm ²	
Static values	I _y = 3690 cm ⁴	W _y = 389 cm ³
	I _z = 1340 cm ⁴	W _z = 134 cm ³

Actions

Id	Type	Situation	Name	γ _{sup}	γ _{inf}	ψ ₀	ψ ₁	ψ ₂
99	G	P/T	Permanent loads	1.35	1.00	1.00	1.00	1.00
1	Q	P/T	Cat. A: domestic, residential areas	1.50	0.00	0.70	0.50	0.30

Loads

Type 2 = Uniformly distributed load kN/m
 The dead load is automatically taken into account.

Legend output option

No.	Type	pi	a [m]	pj	l [m]	ey [cm]	ez [cm]	Description	Act
1	2	4.0				0.0	-9.5	5.00 kN/m ² × 1.00 m	99
2	7	10.0	0.00	3.0	5.00	0.0	-9.5	10.00 kN/m ² × 1.00 m	1

Frequently asked questions

Structural system

Can I also calculate multi-span systems in STT+?

No. STT+ allows the calculation of single-span beams only. However, you can define lateral supports in the form of discrete or continuous supports. The application point relevant for the stability analyses can be defined either on the top chord, the bottom cord or in the shear centre.

Loads

Can I specify loads that produce planned torsion?

No. Loads that produce planned torsion are not considered in STT+. The most important reason for this restriction is that the equivalent member verification must not be used in a comparable load situation. In such a case, a second-order analysis of torsional warping is required. We like to point out in this connection that our BTII+ module is able to perform this task.

Calculation

Can I perform a second-order analysis in addition to the verification based on the equivalent member method?

No. Systems requiring second-order analyses can be calculated with our BTII+ module.